

Input	Colour Temp.K	Dimmable	CRI	IP	Life
230V	3000/4000/6000	No	>80 R9>0	IP40	50,000hr L70

Frame	Diffuser	PF	Warranty	Efficacy	Beam Angle
WhiteAluminium	PS	0.95	3yrs	To 100Lm/W	112 deg


MOUNTING
Surface TBar/Plaster/Wire

3 CCT Selectable LED panel

White frame finish to match T Bar rails
Even light distribution
Ideal for commercial applications
Low running temperature

KEY FEATURES

- In line selectable colour temperature (K) switch
- Aluminium Frame Powder Coated White
- To Suit T Bar ceilings, can be surface/wall mounted with kit (available separately) or plaster frame (not supplied)
- Flicker free
- Edge lit SMD3014 (240pcs & 476pcs) 36V DC 900/1100mA
- Long life 50,000hr L70
- Energy saving up to 50% compared to T8
- Frame thickness 10mm
- UGR 22
- Operating Temp -20° + 45°
- 1.2M Flex & Plug fitted SAA Approved 0.75mm
- SAA Approved driver
- Quick connectors with SAA approved 0.5mm cable
- Seismic restraint attachments available (4pcs per kit)
- Surface kits screw-less type on request
- Will suit all plaster frames

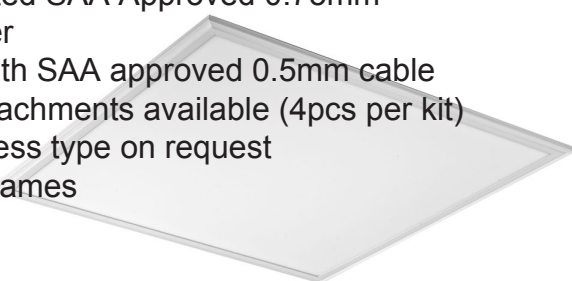

SKU CODE	WATT	LUMEN	DIMENSIONS	WEIGHT
PAN300 -3	36W	3,500lm	1195x295	2.4kg
PAN600-3	36W	3,700lm	595x595mm	2.3kg
PAN1200-3	52W	5,850lm	1195x595mm	4.2kg