

Hugo IP65 LED Weatherproof


A low energy, enclosed linear IP65 LED Underverandah project luminaire ideal for exterior and industrial areas including carparks and stairwells.

Impact rating rating of IK08 and an Ingress Rating of IP65 featuring Epistar 2835 LED chips mounted on Aluminium gear tray and offering extremely high output of lumens.

Very low operation costs.

Key Features

- IP65 weather proof rating
- PC diffuser and base
- Through wiring
- Mechanical impact rating IK08 (IEC 62262)
- Quick install and cliplless
- Long life 50,000hr
- 4,000K colour temperature
- CRI 80+
- Aluminium gear tray
- Running temperatures -25C to 40C

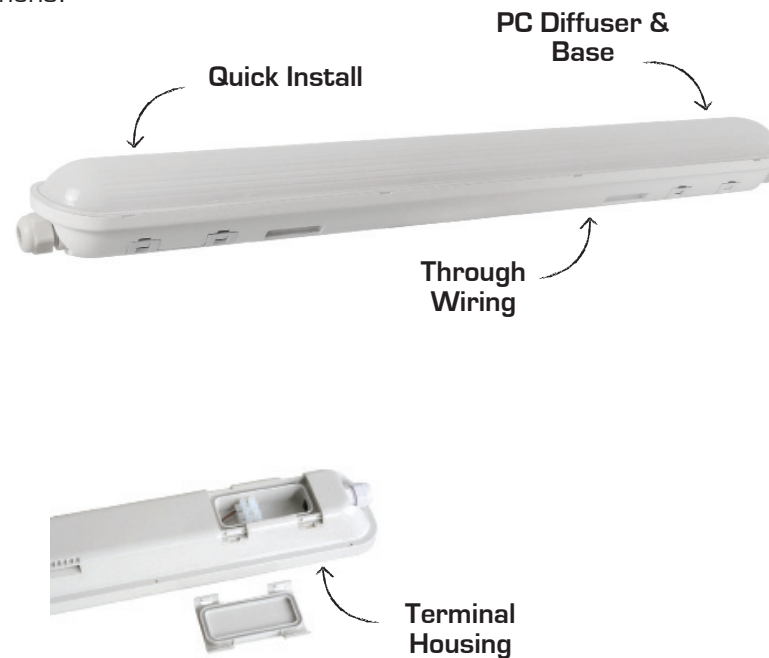

SKU Code	WP11200	WP11500
Input	230V	230V
Wattage	40W	55W
Lumen	5,200lm	7,150lm
Dimensions	72 x 1180mm	72 x 1480mm
Projection	61mm	61mm
Dimmable	No	No
CRI	80+	80+
Material	Polycarbonate	Polycarbonate
Colour Temp	4,000K	4,000K
Warranty	5 years	5 years
Rating	IK08	IK08
IP	IP65	IP65